


Step 1: Commercial Window RO Flashing System

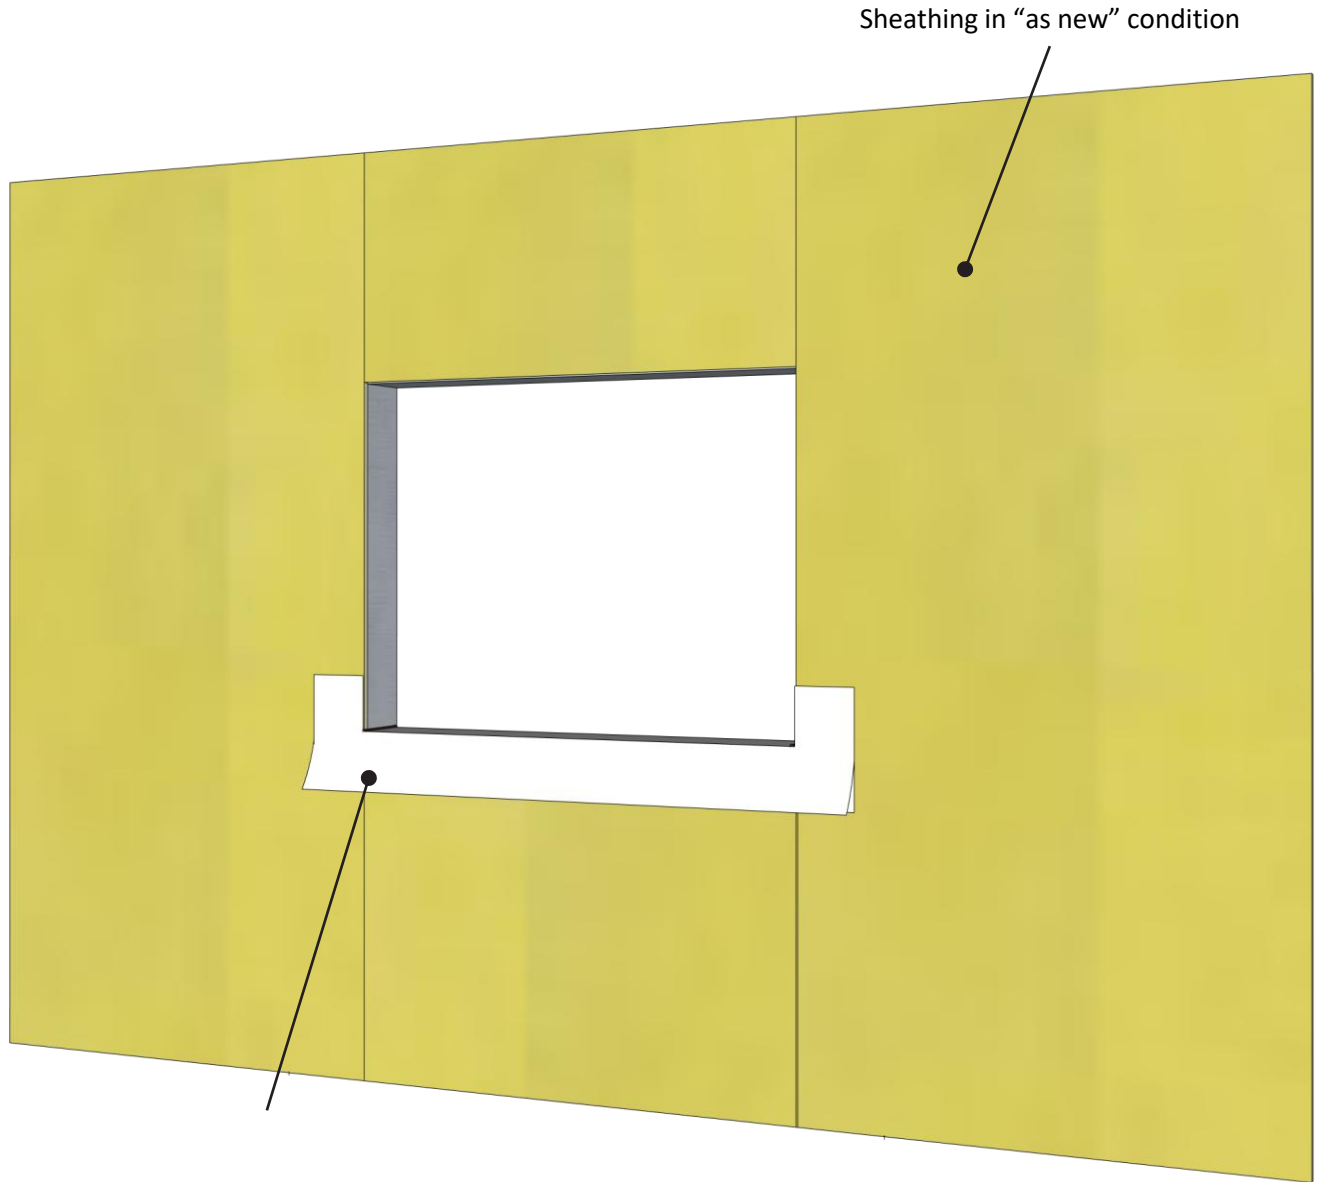

VaproFlashing SA Self-Adhered properly shingled; applied directly to sheathing + folded 6" inside of R.O.

Note: Total of 12" of flashing should be used:

- 6" of flashing should be left on the face of the sheathing
- 6" of release film from the bottom of the flashing to be left attached for shingling over membrane.

CANSHIELD[™] **VP**

PRODUCT DESCRIPTION

CanShield VP is a vapour permeable, self-adhered, water-resistive air barrier

VaproFlashing SA is an air, water, and vapor barrier flashing with an aggressive pressure sensitive adhesive that does not require a primer

DISCLAIMER

Detail sketch is generic, representing suggested best practices for VaproShield materials, and does not represent a specific job site condition and therefore may not be applicable to certain projects. Detail sketch is designed for use as a reference and must be approved by the designer/ consultant of record for each project prior to installation by the subcontractor. Changes and approvals of VaproShield details are the sole responsibility of the designer/consultant of record. VaproShield is **not** the designer of record for building enclosure details and takes no responsibility for the accuracy or interpretation of actual project site conditions.


VAPROFLASHING SA[™]

DRAWN BY: AR

DATE: 6/2025

REF: 348

Always check www.VaproShield.com for the latest details and installation instructions

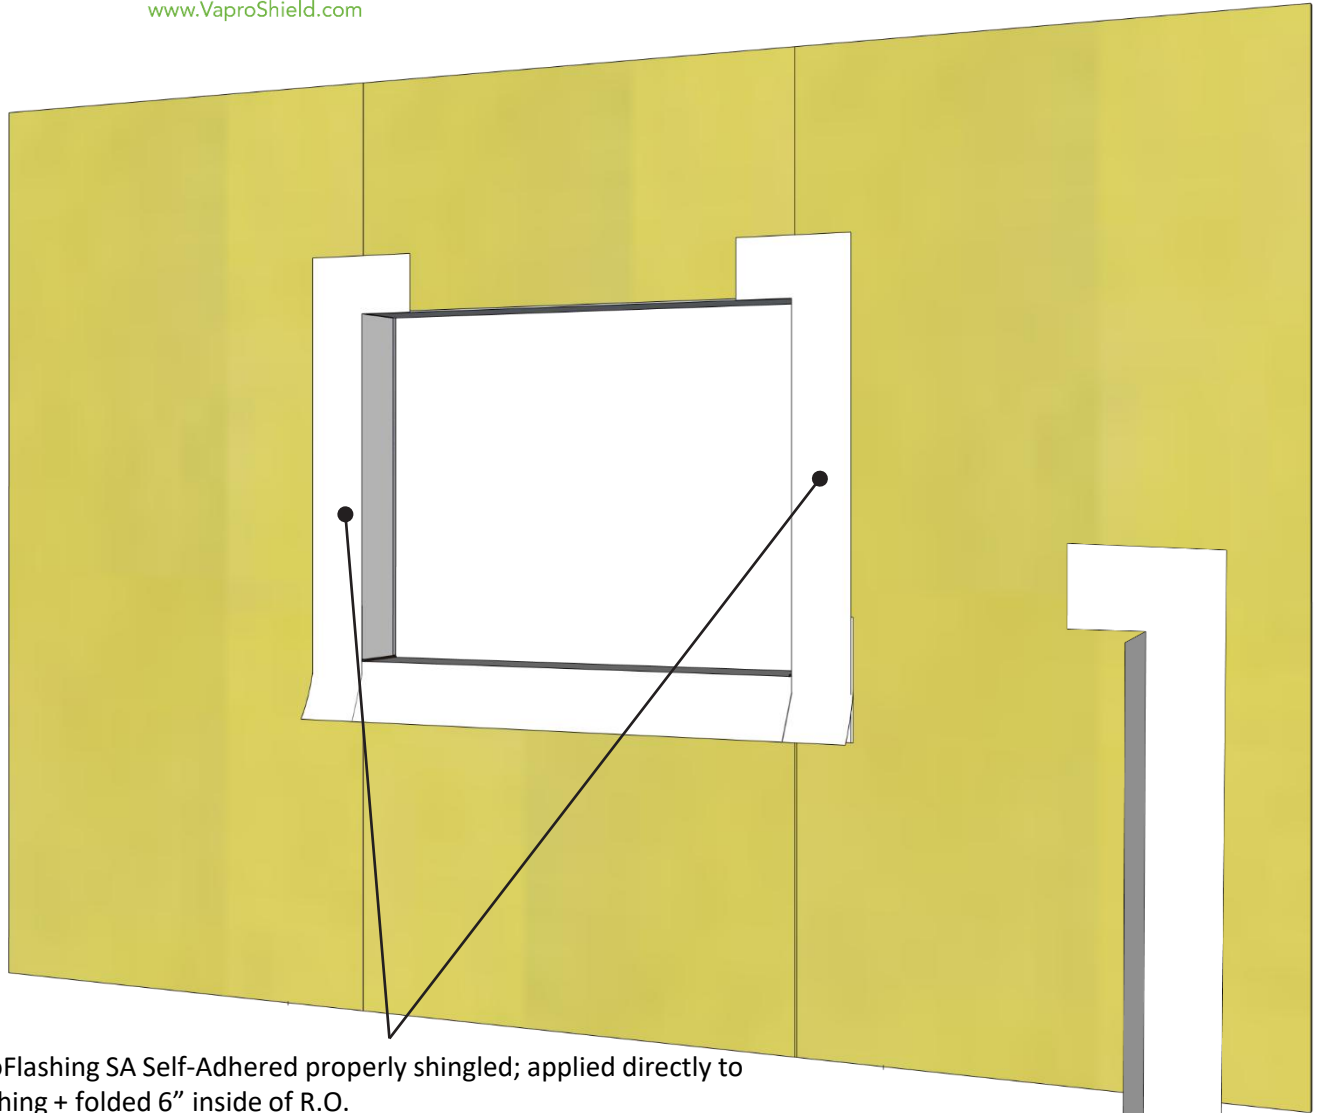

VaproFlashing SA Self-Adhered properly shingled; applied directly to sheathing + folded 6" inside of R.O.

Note: Total of 12" of flashing should be used:

- 6" of flashing should be left on the face of the sheathing
- 6" of release film from the bottom of the flashing to be left attached for shingling over membrane.

Note: bottom horizontal flaps of flashing can be trimmed off

CANSHIELD[™] VP

PRODUCT DESCRIPTION

CanShield VP is a vapour permeable, self-adhered, water-resistive air barrier

VaproFlashing SA is an air, water, and vapor barrier flashing with an aggressive pressure sensitive adhesive that does not require a primer

DISCLAIMER

Detail sketch is generic, representing suggested best practices for VaproShield materials, and does not represent a specific job site condition and therefore may not be applicable to certain projects. Detail sketch is designed for use as a reference and must be approved by the designer/consultant of record for each project prior to installation by the subcontractor. Changes and approvals of VaproShield details are the sole responsibility of the designer/consultant of record. VaproShield is **not** the designer of record for building enclosure details and takes no responsibility for the accuracy or interpretation of actual project site conditions.

DRAWN BY: AR

DATE: 3/2025


REF: 348

Always check www.VaproShield.com for the latest details and installation instructions

VaproFlashing SA Self-Adhered properly shingled; applied directly to sheathing + folded 6" inside of R.O.

Note: Total of 12" of flashing should be used:

- 6" of flashing should be left on the face of the sheathing

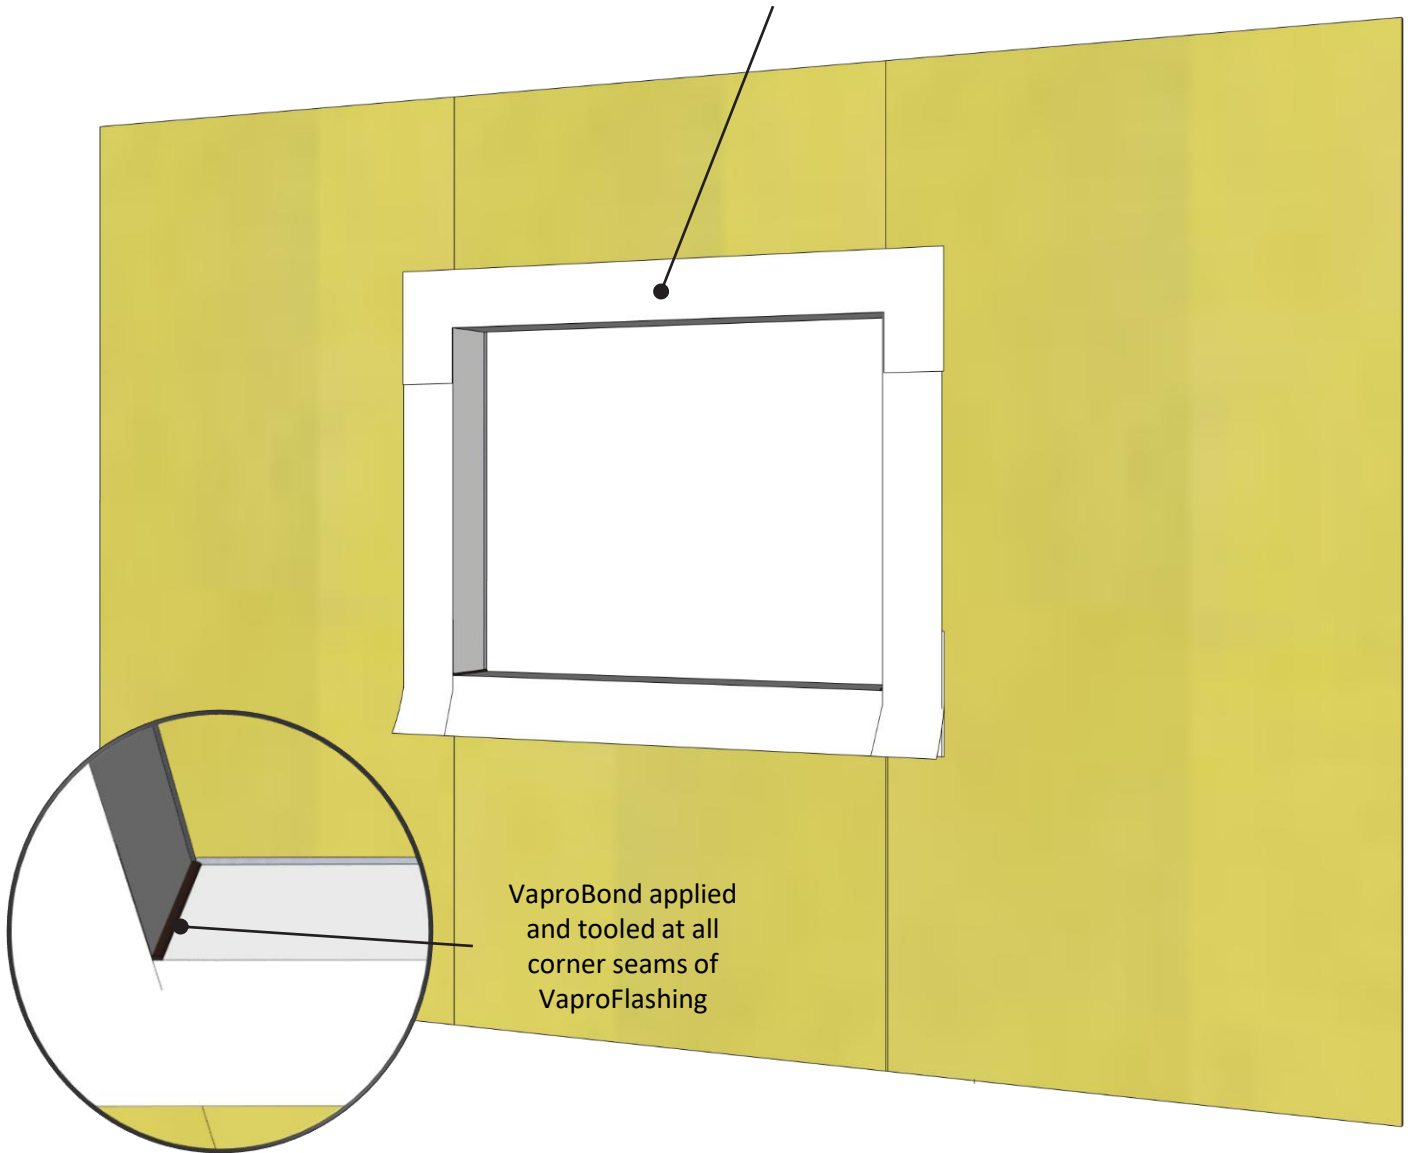

CANSHIELD[™] VP

VAPROFLASHING SA[™]

PRODUCT DESCRIPTION

CanShield VP is a vapour permeable, self-adhered, water-resistive air barrier

VaproFlashing SA is an air, water, and vapor barrier flashing with an aggressive pressure sensitive adhesive that does not require a primer

DISCLAIMER


Detail sketch is generic, representing suggested best practices for VaproShield materials, and does not represent a specific job site condition and therefore may not be applicable to certain projects. Detail sketch is designed for use as a reference and must be approved by the designer/ consultant of record for each project prior to installation by the subcontractor. Changes and approvals of VaproShield details are the sole responsibility of the designer/consultant of record. VaproShield is **not** the designer of record for building enclosure details and takes no responsibility for the accuracy or interpretation of actual project site conditions.

DRAWN BY: AR

DATE: 3/2025

REF: 348

Always check www.VaproShield.com for the latest details and installation instructions

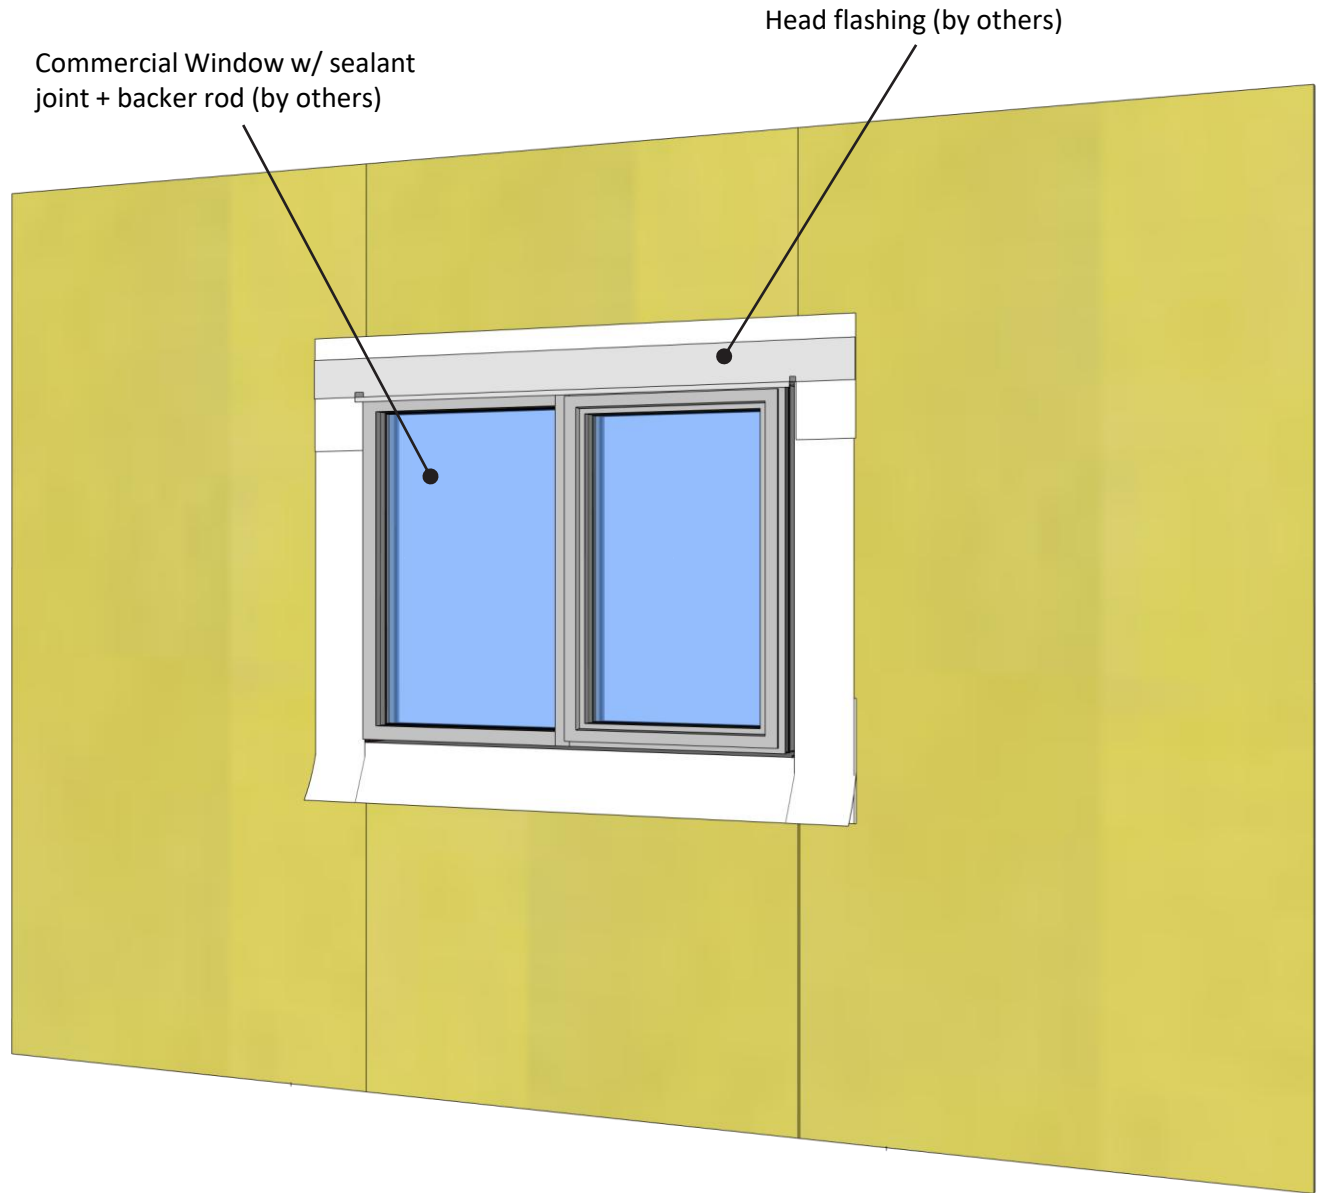

CANSHIELD™ VP

PRODUCT DESCRIPTION

CanShield VP is a vapour permeable, self-adhered, water-resistive air barrier

VaproFlashing SA is an air, water, and vapor barrier flashing with an aggressive pressure sensitive adhesive that does not require a primer

DISCLAIMER

Detail sketch is generic, representing suggested best practices for VaproShield materials, and does not represent a specific job site condition and therefore may not be applicable to certain projects. Detail sketch is designed for use as a reference and must be approved by the designer/ consultant of record for each project prior to installation by the subcontractor. Changes and approvals of VaproShield details are the sole responsibility of the designer/consultant of record. VaproShield is **not** the designer of record for building enclosure details and takes no responsibility for the accuracy or interpretation of actual project site conditions.

DRAWN BY: AR

DATE: 3/2025

REF: 348

Always check www.VaproShield.com for the latest details and installation instructions



CanShield VP field membrane installed underneath 6" flap of VaproFlashing SA to create shingle effect

CANSHIELD™ VP
VAPROFLASHING SA™

PRODUCT DESCRIPTION

CanShield VP is a vapour permeable, self-adhered, water-resistive air barrier

VaproFlashing SA is an air, water, and vapor barrier flashing with an aggressive pressure sensitive adhesive that does not require a primer

DISCLAIMER


Detail sketch is generic, representing suggested best practices for VaproShield materials, and does not represent a specific job site condition and therefore may not be applicable to certain projects. Detail sketch is designed for use as a reference and must be approved by the designer/ consultant of record for each project prior to installation by the subcontractor. Changes and approvals of VaproShield details are the sole responsibility of the designer/consultant of record. VaproShield is **not** the designer of record for building enclosure details and takes no responsibility for the accuracy or interpretation of actual project site conditions.

DRAWN BY: AR

DATE: 3/2025

REF: 348

Always check www.VaproShield.com for the latest details and installation instructions

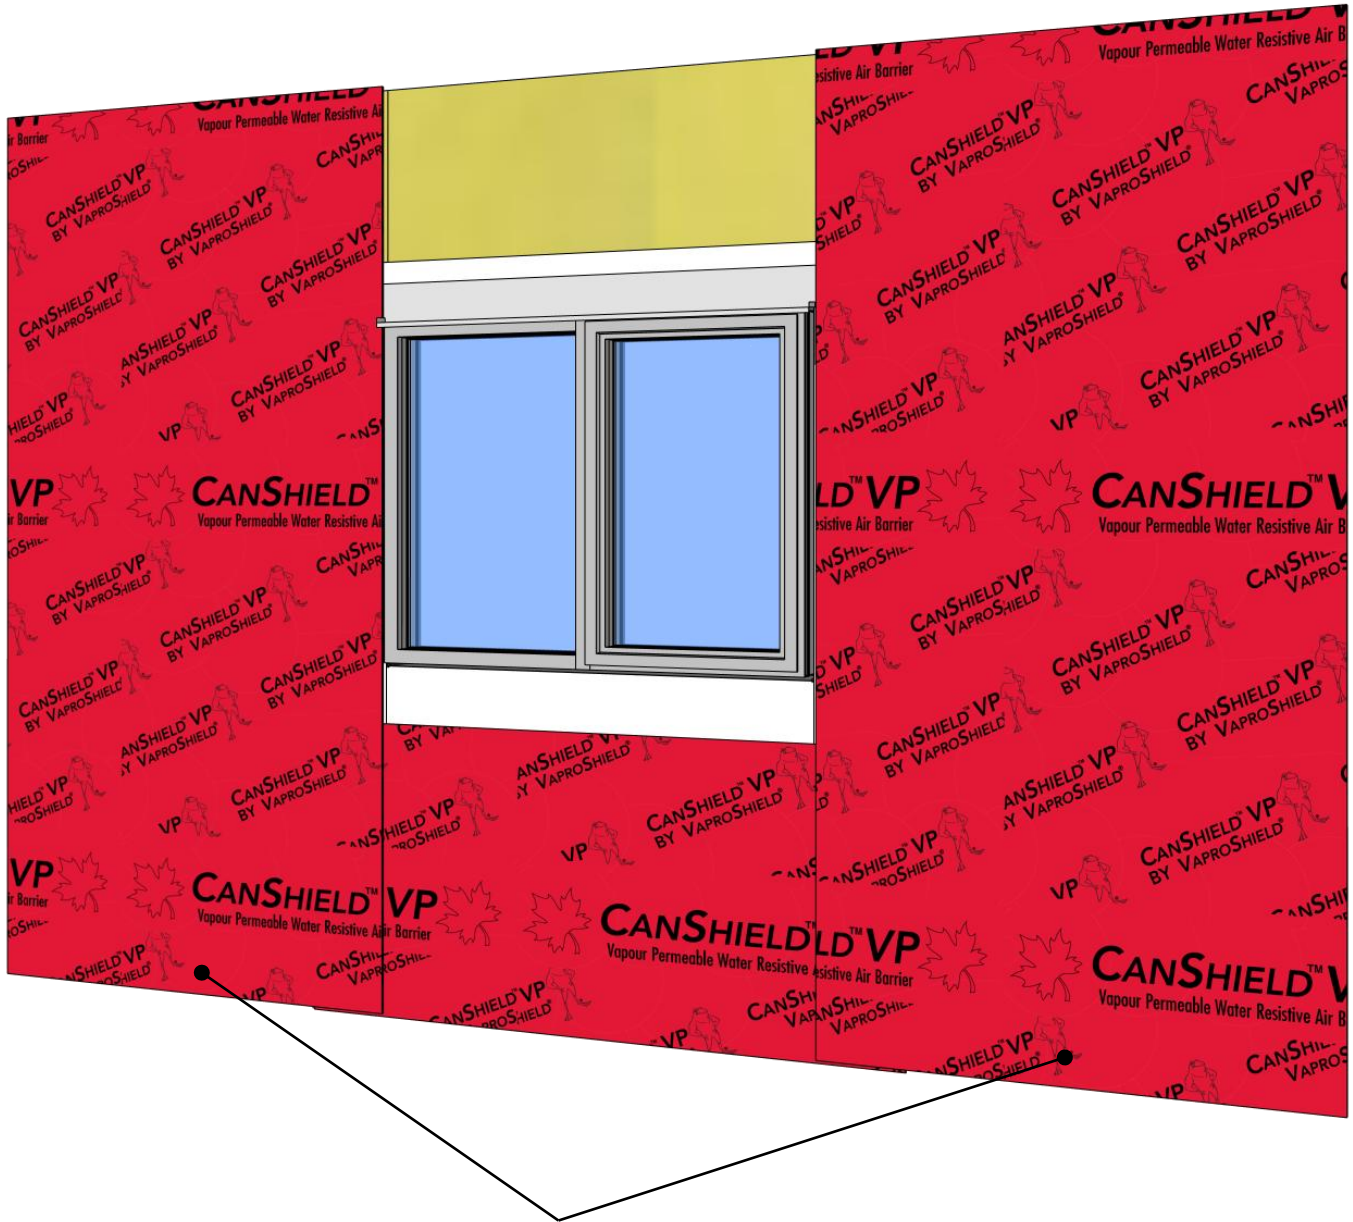

CanShield VP field membrane installed with minimum 3" overlap

CANSHIELD™ VP
VAPROFLASHING SA™

PRODUCT DESCRIPTION

CanShield VP is a vapour permeable, self-adhered, water-resistive air barrier

VaproFlashing SA is an air, water, and vapor barrier flashing with an aggressive pressure sensitive adhesive that does not require a primer

DISCLAIMER

Detail sketch is generic, representing suggested best practices for VaproShield materials, and does not represent a specific job site condition and therefore may not be applicable to certain projects. Detail sketch is designed for use as a reference and must be approved by the designer/consultant of record for each project prior to installation by the subcontractor. Changes and approvals of VaproShield details are the sole responsibility of the designer/consultant of record. VaproShield is not the designer of record for building enclosure details and takes no responsibility for the accuracy or interpretation of actual project site conditions.


DRAWN BY: AR

DATE: 3/2025

REF: 348

Always check www.VaproShield.com for the latest details and installation instructions

CanShield VP installed over head flashing and VaproFlashing SA

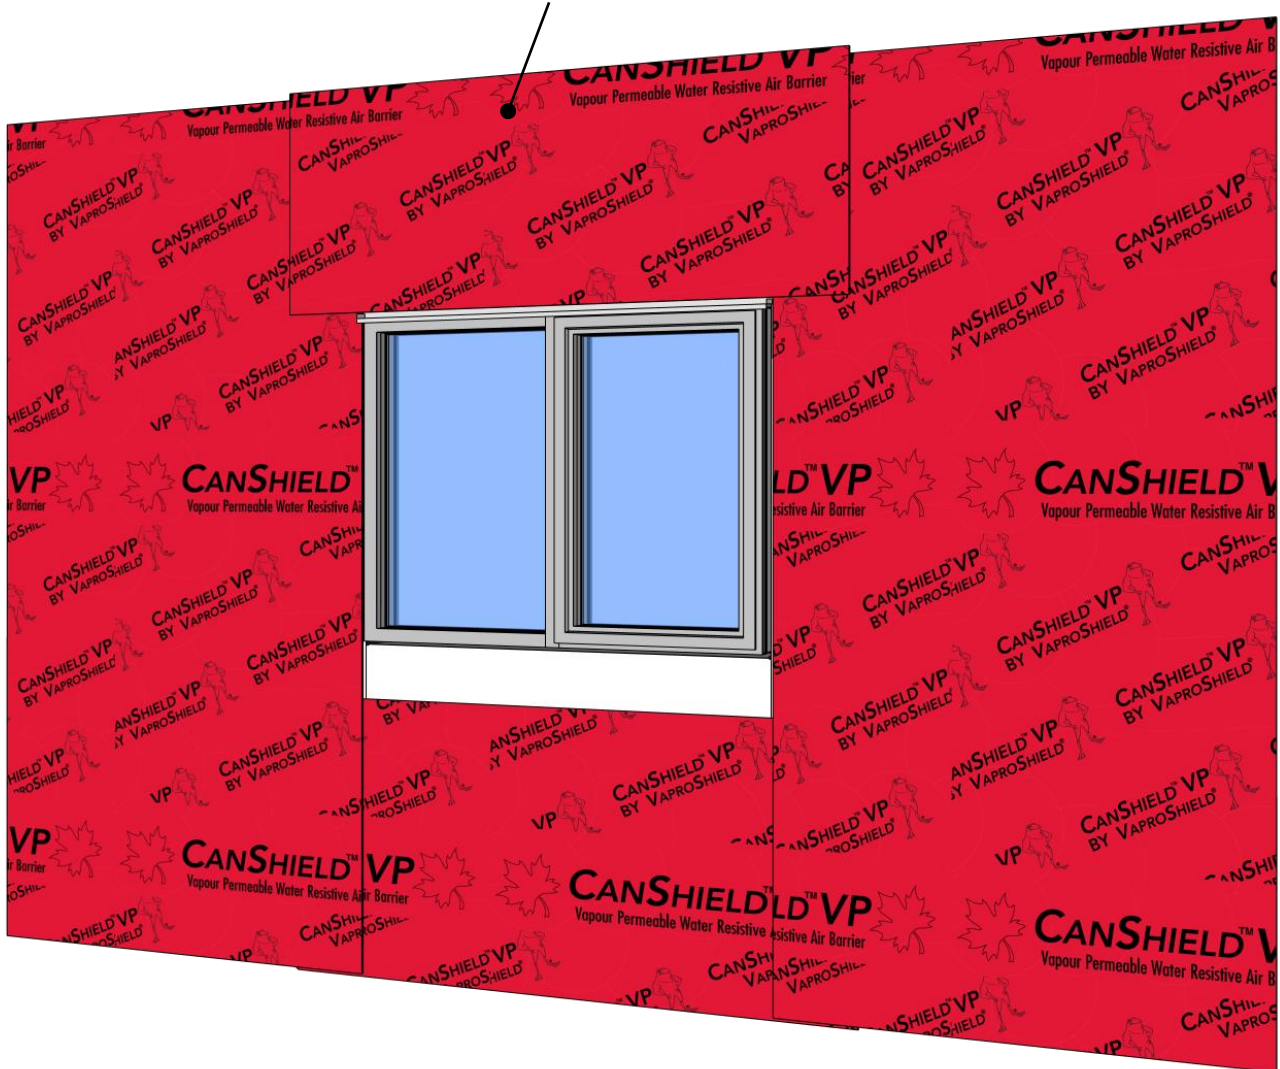

CANSHIELD[™] VP
VAPROFLASHING SA[™]

PRODUCT DESCRIPTION

CanShield VP is a vapour permeable, self-adhered, water-resistive air barrier

VaproFlashing SA is an air, water, and vapor barrier flashing with an aggressive pressure sensitive adhesive that does not require a primer

DISCLAIMER

Detail sketch is generic, representing suggested best practices for VaproShield materials, and does not represent a specific job site condition and therefore may not be applicable to certain projects. Detail sketch is designed for use as a reference and must be approved by the designer/ consultant of record for each project prior to installation by the subcontractor. Changes and approvals of VaproShield details are the sole responsibility of the designer/consultant of record. VaproShield is not the designer of record for building enclosure details and takes no responsibility for the accuracy or interpretation of actual project site conditions.

DRAWN BY: AR

DATE: 3/2025

REF: 348

Always check www.VaproShield.com for the latest details and installation instructions